



# **FILTERED & THERMALLY STABLE ACCELEROMETERS**

---

# FILTERED ACCELEROMETERS

Environments with mechanical shock and with significant high frequency vibration content necessitate specialized accelerometers tailored for these demanding test conditions. Mechanical shock events can excite the high frequency resonance of the piezoelectric crystal, saturating the signal and leading to clipping in the ICP® signal conditioning amplifier. To help alleviate this event, PCB offers low pass filtering in select accelerometers which suppresses the effects of any crystal resonance before it can enter and over range the ICP® signal conditioning amplifier. Another purpose for filtering is to extend the usable high frequency range of the sensor by minimizing crystal resonance, resulting in an extended flat frequency response.

## FILTER CHARACTERISTICS


PCB integrates a low pass filter between the sensing crystal and the ICP® amplifier on a select number of accelerometers, avoiding amplifier saturation and extending useful frequency response. These filters are uniquely specified based on the intended application environment and the design of the sensor. Two values are represented on PCB's product specification sheet that define this filter:

- **Electric Filter Roll Off** – the severity of the filter
  - 1<sup>st</sup> Order (Single Pole or 6 dB / Octave) commonly used to extend useable frequency range
  - 2<sup>nd</sup> Order (Two Pole or 12 dB / Octave) commonly used to avoid amplifier saturation
- **Electric Filter Corner Frequency** – the frequency at which the signal of interest is attenuated 3 dB


## APPLICATIONS WHERE FILTERING MAY BE NEEDED:

- Powertrain Development
- Climatic Chamber Testing
- Powertrain NVH
- Cylinder head
- Vehicle Systems NVH
  - Under-hood
  - Exhaust Testing
  - Brake Testing
- Component and Systems Performance
- Vehicle Road Load & durability
- Racing
- Flight Testing
- Aerospace applications - High-frequency airframe vibration monitoring
- General purpose applications with potential for signal saturation



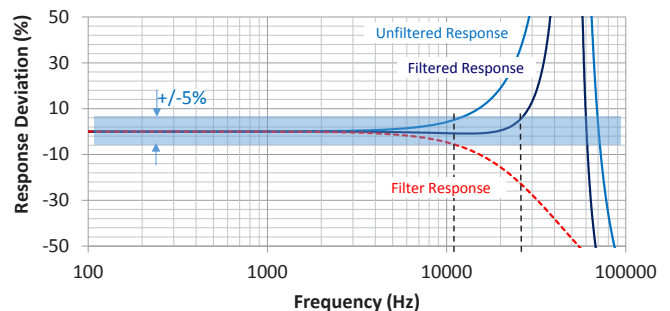

### Filtering to Extend Useable Frequency Range

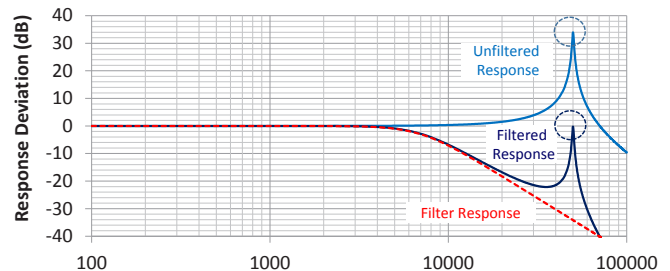





### Filtering to Minimize Amplifier Saturation



## SPECIFICATIONS

								
Model Number	356A67		356A63		356A66		356A61	
Performance	English	SI	English	SI	English	SI	English	SI
Sensitivity ( $\pm 10\%$ )	10 mV/g	1.02 mV/(m/s <sup>2</sup> )	10 mV/g ( $\pm 15\%$ )	1.02 mV/(m/s <sup>2</sup> ) ( $\pm 15\%$ )	10 mV/g	1.02 mV/(m/s <sup>2</sup> )	10 mV/g	1.02 mV/(m/s <sup>2</sup> )
Measurement Range	$\pm 500$ g pk	$\pm 4900$ m/s <sup>2</sup> pk	$\pm 500$ g pk	$\pm 4905$ m/s <sup>2</sup> pk	$\pm 500$ g pk	$\pm 4900$ m/s <sup>2</sup> pk	$\pm 500$ g pk	$\pm 4905$ m/s <sup>2</sup> pk
Frequency Range ( $\pm 5\%$ )	0.5 to 3000 Hz		2 to 4000 Hz		2 to 4000 Hz		2 to 4000 Hz	
Temperature Range (Operating)	-65 to 250 °F	-54 to 121 °C	-65 to 250 °F	-54 to 121 °C	-65 to 250 °F	-54 to 121 °C	-65 to 325 °F	-54 to 163 °C
Resonant Frequency	$\geq 25$ kHz		$\geq 55$ kHz		$\geq 35$ kHz		$\geq 55$ kHz	
Filter Type	Single pole (LP)		Single pole (LP)		Single pole (LP)		Single pole (LP)	
Electrical Filter Corner Frequency	$\geq 10$ kHz		$\geq 15$ kHz		$\geq 35$ kHz		$\geq 15$ kHz	
Broadband Resolution	0.0005 g rms	0.005 m/s <sup>2</sup> rms	0.008 g rms	0.08 m/s <sup>2</sup> rms	0.002 g rms	0.02 m/s <sup>2</sup> rms	0.008 g rms	0.08 m/s <sup>2</sup> rms
Non-Linearity	$\leq 1\%$		$\leq 1\%$		$\leq 1\%$		$\leq 1\%$	
Transverse Sensitivity	$\leq 5\%$		$\leq 5\%$		$\leq 5\%$		$\leq 5\%$	
<b>Physical</b>								
Weight	0.37 oz	10.5 gm	0.19 oz	5.3 gm	0.32 oz	9.0 gm	0.14 oz	4.0 gm
Size	0.55 in Cube	14 mm Cube	0.40 in Cube	10.2 mm Cube	0.55 in Cube	14 mm Cube	0.4 in Cube	10.2 mm Cube
Electrical Connector	1/4-28 4-Pin		1/4-28 4-Pin		1/4-28 4-Pin		Integral cable terminating to 1/4-28 4-Pin Jack	
Mounting	10-32 Female		5-40 Female		10-32 Female		5-40 Female	
Included Cable	No		No		No		Yes, 034G05	

## SPECIFICATIONS

								
Model Number	350B50		352A72		353B77		320C20	
Performance	English	SI	English	SI	English	SI	English	SI
Sensitivity	0.5 mV/g ( $\pm 30\%$ )	0.05 mV/(m/s <sup>2</sup> ) ( $\pm 30\%$ )	10 mV/g ( $\pm 15\%$ )	1.02 mV/(m/s <sup>2</sup> ) ( $\pm 15\%$ )	2.0 mV/g ( $\pm 20\%$ )	0.204 mV/(m/s <sup>2</sup> ) ( $\pm 20\%$ )	10 mV/g ( $\pm 10\%$ )	1.02 mV/(m/s <sup>2</sup> ) ( $\pm 10\%$ )
Measurement Range	$\pm 10000$ g pk	$\pm 98000$ m/s <sup>2</sup> pk	$\pm 500$ g pk	$\pm 4900$ m/s <sup>2</sup> pk	$\pm 2500$ g pk	$\pm 24525$ m/s <sup>2</sup> pk	$\pm 500$ g pk	$\pm 4900$ m/s <sup>2</sup> pk
Frequency Range	3 to 10000 Hz ( $\pm 1\%$ )		0.5 to 4500 Hz ( $\pm 5\%$ )		0.7 to 20000 Hz ( $\pm 10\%$ )		1.5 to 10000 Hz ( $\pm 10\%$ )	
Temperature Range (Operating)	-65 to 250 °F	-54 to 121 °C	-65 to 200 °F	-54 to 93 °C	-65 to 250 °F	-54 to 121 °C	-100 to 325 °F	-73 to 163 °C
Resonant Frequency	$\geq 60$ kHz		$\geq 65$ kHz		$\geq 70$ kHz		$\geq 60$ kHz	
Filter Type	Two pole (LP)		Single pole (LP)		Single pole (LP)		Single pole (LP)	
Electrical Filter Corner Frequency	$\geq 20$ kHz		$\geq 15$ kHz		$\geq 30$ kHz		$\geq 13$ kHz	
Broadband Resolution	0.03 g rms	0.29 m/s <sup>2</sup> rms	0.003 g rms	0.03 m/s <sup>2</sup> rms	0.05 g rms	0.5 m/s <sup>2</sup> rms	0.006 g rms	0.06 m/s <sup>2</sup> rms
Non-Linearity	$\leq 2\%$		$\leq 1\%$		$\leq 1\%$		$\leq 1\%$	
Transverse Sensitivity	$\leq 5\%$		$\leq 5\%$		$\leq 5\%$		$\leq 5\%$	
<b>Physical</b>								
Weight	0.3 oz	8.0 gm	0.023 oz	0.64 gm	0.06 oz	1.7 gm	0.23 oz	6.5 gm
Size	0.32 in x 0.72 in x 0.72 in	8.2 mm x 18.3 mm x 18.3 mm	0.41 in x 0.25 in x 0.14 in	10.4 mm x 6.4 mm x 3.6 mm	0.59 in	15.0 mm	0.87 in	22.1 mm
Electrical Connector	Integral cable		Solder pins with attached cable		Solder pins		10-32 Coaxial jack	
Mounting	Through hole		Adhesive		5-40 Male		10-32 Male	
Included Cable	No		No		No		No	


# THERMALLY STABLE AND FILTERED ACCELEROMETERS

In 2007, an engine manufacturer approached PCB to develop a new type of ICP® filtered accelerometer with a stable sensitivity over a wide temperature range. Soon after PCB developed a specialized ICP® filtered accelerometer using UHT-12™ crystal technology with extremely stable sensitivity over a wide temperature range, better than quartz or ceramic. In addition to improved accuracy over temperature this new line of accelerometers exhibit low noise, low base strain sensitivity (shear mode construction), and a wide operating frequency range. PCB has expanded these products into a Low Temperature Coefficient (LTC) product line to cover a wide variety of demanding applications. With filtering, temperature coefficients down to 0.005% / °F (0.009% / °C), and operating temperatures to 356 °F (180 °C) this new line of titanium and hermetically sealed accelerometers are ideal for powertrain testing, flight testing, and any other application requiring robust sensing in challenging environments. The LTC series of accelerometers are available in a range sensitivities and mounting configurations (stud, adhesive and thru-hole).

## PCB series of LTC Accelerometers offer the following:

- Sensitivity that remains consistent over a wide temperature change
- Single pole filtering
- Titanium housing
- Hermetic sealing
- Wide operating frequency range
- Shear mode configuration, isolated from base strain and transverse measurement errors
- Single axis and triaxial configurations
- Ranges from 50 g to 5000 g
- ICP® technology for ease of use


**Typical ICP® Sensor Sensitivity Deviation vs. Temperature**  
 UHT-12 vs. Quartz vs. Ceramic Sensing Elements

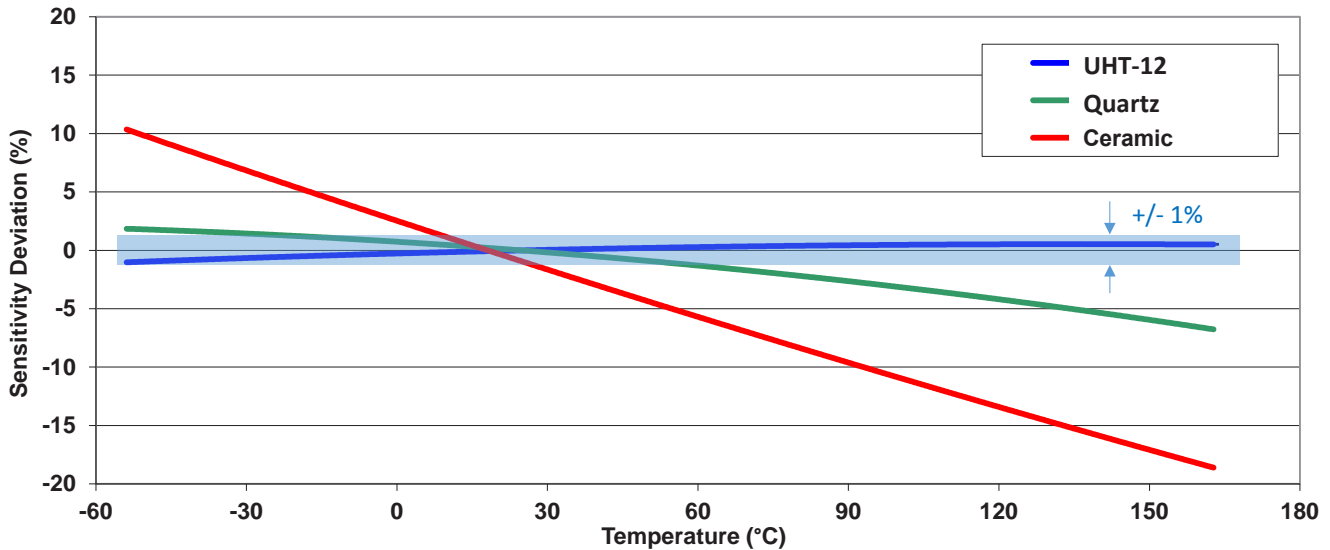

Temperature Coefficient of Sensitivity as defined in PCB product specification sheets are calculated by determining the slope of the tangent line at any given point on the Sensitivity Deviation vs. Temperature plot (above). In this manner the Temperature Coefficient of Sensitivity is always equal to or lower than the specification at any given temperature.






PCB offers a portfolio of thermally stable and filtered ICP<sup>®</sup> accelerometers, both single and triaxial configurations with operating temperatures up to 356 °F (180 °C).

SPECIFICATIONS						
						
Model Number	320C52		320C53		339B32	
Performance	English	SI	English	SI	English	SI
Sensitivity (±10%)	10 mV/g	1.02 mV/(m/s <sup>2</sup> )	1 mV/g (±20%)	0.102 mV/(m/s <sup>2</sup> ) (±20%)	10 mV/g	1.02 mV/(m/s <sup>2</sup> )
Measurement Range	±500 g pk	±4905 m/s <sup>2</sup> pk	±5000 g pk	±49050 m/s <sup>2</sup> pk	±500 g pk	±4905 m/s <sup>2</sup> pk
Frequency Range (±5%)	1 to 10000 Hz		1 to 5000 Hz		2 to 10000 Hz	
Temperature Range (Operating)	-100 to 325 °F	-73 to 163 °C	-100 to 325 °F	-73 to 163 °C	-65 to 325 °F	-54 to 163 °C
Temperature Coefficient of Sensitivity	±0.005 %/°F	±0.009 %/°C	±0.005 %/°F	±0.009 %/°C	≤ 0.011 %/°F	≤ 0.020 %/°C
Resonant Frequency	≥ 50 kHz		≥ 50 kHz		≥ 45 kHz	
Filter Type	Single pole (LP)		Single pole (LP)		Single pole (LP)	
Electrical Filter Corner Frequency	> 35 kHz		> 20 kHz		> 14 kHz	
Broadband Resolution	0.004 g rms	0.039 m/s <sup>2</sup> rms	0.04 g rms	0.39 m/s <sup>2</sup> rms	0.003 g rms	0.029 m/s <sup>2</sup> rms
Non-Linearity	≤ 1 %		≤ 1 %		≤ 0.5 %	
Transverse Sensitivity	≤ 5 %		≤ 5 %		≤ 5 %	
TEDS Compliant (Per IEEE 1451.4)	No		No		No	
Physical						
Weight	0.065 oz	1.85 gm	0.065 oz	1.85 gm	0.13 oz	3.6 gm
Size	0.23 in x 0.65 in x 0.38 in	5.8 mm x 16.4 mm x 9.6 mm	0.23 in x 0.65 in x 0.38 in	5.8 mm x 16.4 mm x 9.6 mm	0.28 in x 0.47 in x 0.47 in	7.0 mm x 12.0 mm x 12.0 mm
Electrical Connector	5-44 Coaxial		5-44 Coaxial		8-36 4-Pin	
Mounting	Through Hole		Through Hole		Adhesive	
Included Cable	No		No		Model 339B32 – Yes (034K10) Model 339B32/NC – No	





## SPECIFICATIONS

						
Model Number	339A30 & 339A30/NC		339A31 & 339A31/NC		339B31 & 339B31/NC	
Performance	English	SI	English	SI	English	SI
Sensitivity (±10%)	10 mV/g	1.02 mV/(m/s <sup>2</sup> )	10 mV/g	1.02 mV/(m/s <sup>2</sup> )	10 mV/g	1.02 mV/(m/s <sup>2</sup> )
Measurement Range	±500 g pk	±4905 m/s <sup>2</sup> pk	±500 g pk	±4905 m/s <sup>2</sup> pk	±500 g pk	±4905 m/s <sup>2</sup> pk
Frequency Range (±5%)	2 to 8000 Hz		2 to 6000 Hz		2 to 8000 Hz	
Temperature Range (Operating)	-65 to 325 °F	-54 to 163 °C	-65 to 325 °F	-54 to 163 °C	-65 to 356 °F	-54 to 180 °C
Temperature Coefficient of Sensitivity	≤ 0.011 %/°F	≤ 0.020 %/°C	≤ 0.011 %/°F	≤ 0.020 %/°C	≤ 0.012 %/°F	≤ 0.022 %/°C
Resonant Frequency	≥ 25 kHz		≥ 25 kHz		≥ 50 kHz	
Filter Type (single pole)	Single pole (LP)		Single pole (LP)		Single Pole (LP)	
Electrical Filter Corner Frequency	> 14 kHz		> 13 kHz		> 14 kHz	
Broadband Resolution	0.008 g rms	0.078 m/s <sup>2</sup> rms	0.008 g rms	0.078 m/s <sup>2</sup> rms	0.008 g rms	0.078 m/s <sup>2</sup> rms
Non-Linearity	≤ 0.5 %		≤ 0.5 %		≤ 0.5 %	
Transverse Sensitivity	≤ 5 %		≤ 5 %		≤ 5 %	
TEDS Compliant (Per IEEE 1451.4)	No		No		No	
<b>Physical</b>						
Weight	0.14 oz	4 gm	0.14 oz	5.5 gm	0.15 oz	4.2 gm
Size	0.4 in cube	10.2 mm cube	0.55 in x 0.4 in x 0.4 in	14 mm x 10.2 mm x 10.2 mm	0.4 in cube	10.2 mm cube
Electrical Connector	8-36 4-Pin		8-36 4-Pin		1/4-28 4-Pin	
Mounting	Adhesive		5-40 Female		10-32 Female	
Included Cable	Model 339A30 – Yes (034K10) Model 339A30/NC – No		Model 339A31 – Yes (034K10) Model 339A31/NC – No		Model 339B31 – Yes (010S10) Model 339B31/NC – No	



## SPECIFICATIONS

				
Model Number	TLD339A36		TLD339A37	
Performance	English	SI	English	SI
Sensitivity (±10%)	10 mV/g	1.0 mV/(m/s <sup>2</sup> )	100 mV/g	10.2 mV/(m/s <sup>2</sup> )
Measurement Range	±500 g pk	±4900 m/s <sup>2</sup> pk	±50 g pk	± 490.5 m/s <sup>2</sup> pk
Frequency Range (±5%)	2 to 5000 Hz		0.3 to 4000 Hz	
Temperature Range (Operating)	-65 to 325 °F	-54 to 163 °C	-65 to 356 °F	-54 to 180 °C
Temperature Coefficient of Sensitivity	≤ -0.03 %/°F	≤ -0.06 %/°C	≤ 0.011 %/°F	≤ 0.02 %/°C
Resonant Frequency	≥ 35 kHz		≥ 35 kHz	
Filter Type (single pole)	Single pole (LP)		Single pole (LP)	
Electrical Filter Corner Frequency	> 13 kHz		≥ 15 kHz	
Broadband Resolution	0.003 g rms	0.029 m/s <sup>2</sup> rms	0.002 g rms	0.019 m/s <sup>2</sup> rms
Non-Linearity	≤ 1 %		≤ 1 %	
Transverse Sensitivity	≤ 5 %		≤ 5 %	
TEDS Compliant (Per IEEE 1451.4)	Yes		Yes	
<b>Physical</b>				
Weight	0.37 oz	10.5 gm	0.37 oz	10.5 gm
Size	0.55 in cube	14.0 mm cube	0.55 in cube	14.0 mm cube
Electrical Connector	1/4-28 4-Pin		1/4-28 4-Pin	
Mounting	5-40 Female		5-40 Female	
Included Cable	No		No	



3425 Walden Avenue, Depew, NY 14043 USA

pcb.com | info@pcb.com | 800 828 8840 | +1 716 684 0001

© 2021 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevco), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at [www.pcb.com/trademarkownership](http://www.pcb.com/trademarkownership).

Auto-Filtering-0821